

Sonde di temperatura - *Temperature probes*

Termocoppie, termoresistenze, cavi compensati, connettori e raccordi

Thermocouple, thermoresistance, wires, connectors and fittings

AV0360 - Sonda per rilevamento temperatura ambiente

Scala: 0...60°C

Precisione: ±1,5°C

Collegamento: tre contatti per inserzione diretta su morsetti

Sensore: LM35D

Per utilizzo esclusivo con i modelli: BINDINO RDT



AV0360 – Environment temperature probe


Range: 0...60°C

Accuracy: ±1,5°C

Connection: three contacts for direct insertion on terminal board

Sensor: LM35D

To be used with models BINDINO RDT



AV0361 - Sonda per rilevamento temperatura ambiente

Con anello di fissaggio e cavo da 1,5 m.

Scala: 0...100°C

Precisione: ±1,5°C

Cavo: silicone / silicone Ø 4,5 mm

Collegamento: 3 fili

Sensore: LM35D

Per utilizzo esclusivo con i modelli: PICO 1569, DIGIROUND 1669 e BINDINO RDT

AV0361 – Environment temperature probe

With ring fastener and 1.5 m cable

Range: 0...100°C


Accuracy: ±1,5°C

Wire: silicone/silicone Ø 4,5 mm

Connection: 3 wire

Sensor: LM35D

To be used with models PICO 1569, DIGIROUND 1669, BINDINO RDT

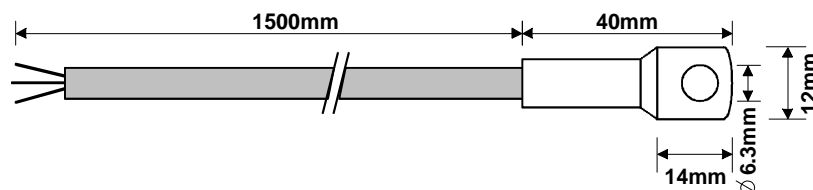

AV0401 - Sonda per rilevamento temperatura ambiente

Come sonda AV0361 (vedi sopra), ma con cavo da 10 m.

AV0401 – Environment temperature probe

Same as AV0361 (see above), but with a 10 m cable